


1. INTERFACE PER MIL-STD-348
2. COUPLING NUT RETENTION: 15 INCH\*LBS
3. COUPLING NUT RETENTION: 60 LBS AXIAL
4. CONTACT RETENTION: 6 LBS AXIAL
5. INSULATOR RETENTION: 6 LBS AXIAL
6. DUREBILITY: TEST AFLER 100 CYCLES

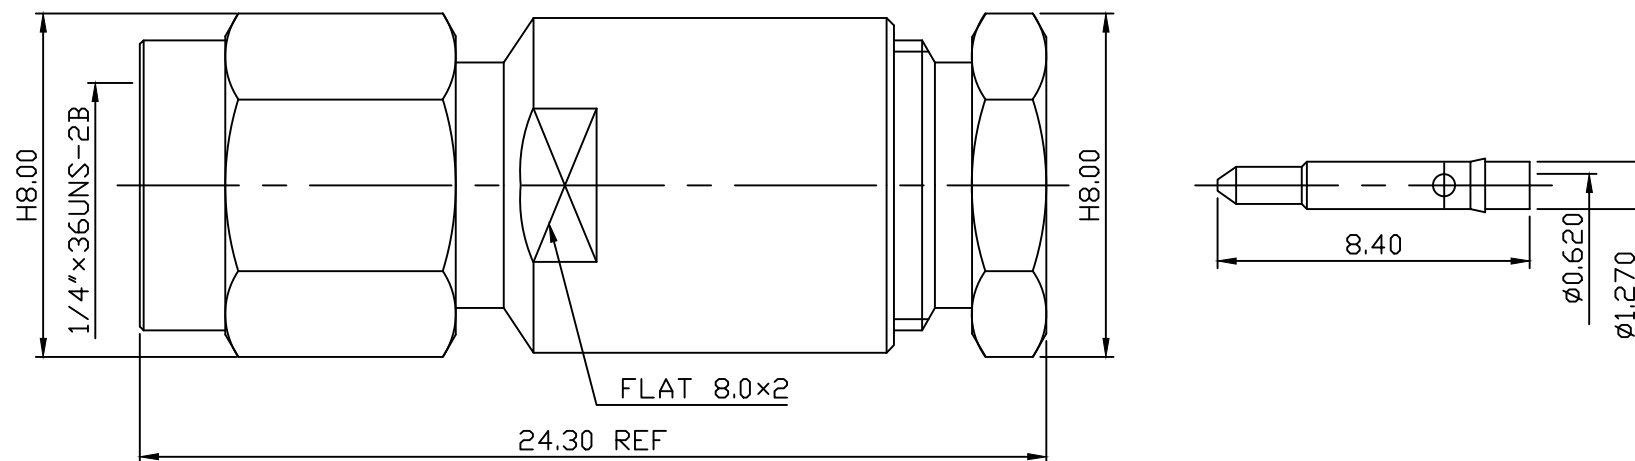

MATERIAL : BODY-BRASS  
 SLEEVE-BRASS  
 SI RUBBER-SILICONE  
 WASHER-BRASS  
 NUT-BRASS  
 C WASHER-SUS 304  
 SHELL-BRASS  
 CONTACT-BRASS  
 INSULATOR-TEFLON

FINISH : BODY-NICKEL PLATING  
 SLEEVE-NICKEL PLATING  
 WASHER-NICKEL PLATING  
 NUT-NICKEL PLATING  
 SHELL-NICLEL PLATING  
 CONTACT-GOLD PLATING OVER NICKEL

DIMENSIONS ARE IN MILLIMETERS TOLERANCE			C&C ELECTRONICS CONNECTORS INC		
· × ±0.5	ANGLE ±3°	SCALE 5:1	TITLE SMA STRAIGHT PLUG CLAMP FOR RG <sub>316</sub> <sup>174</sup> U		
· × × ±0.1		REV A-1	DRAWING NO 806-2102		
· × × × ±0.05		DRAWN 潘曉臨	DATE 100.04.09	FILE NO 806-0125	
APPROVAL		DATE			