


FREQUENCY RANGE DC-18 GHZ
 SYSTEM IMPEDANCE 50 OHMS
 TEMP RANGE:-65/+165°C
 INTERFACES PER MIL-STD-348
 CONTACT RETENTION 6 LBS AXIAL
 INSULATOR RETENTION 6 LBS AXIAL

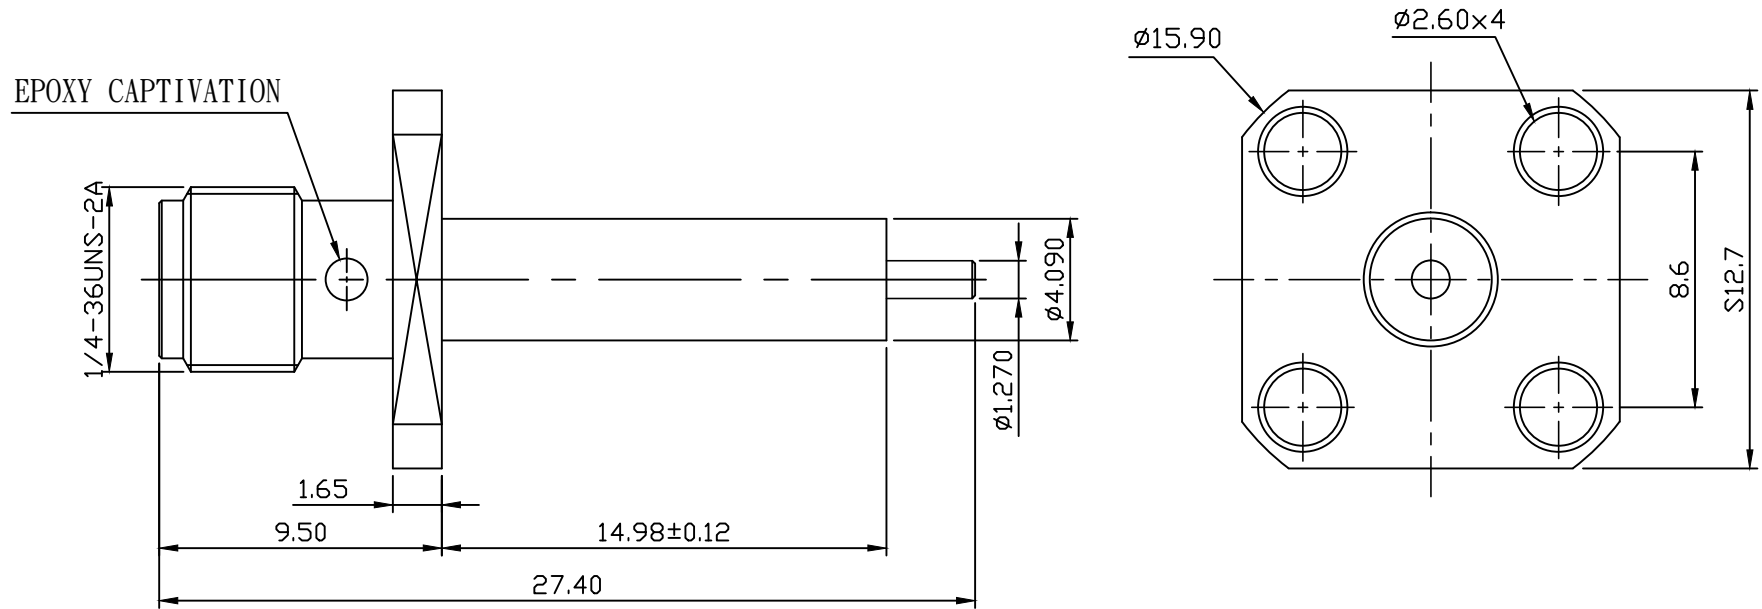

MATERIAL : BODY-SUS303
 CONTACT-BeCu
 INSULATOR-TEFLON
 FINISH : BODY-PASSIVATED
 CONTACT-GOLD PLATING OVER NICKEL

DIMENSIONS ARE IN MILLIMETERS TOLERANCE				C&C ELECTRONICS CONNECTORS INC	
· ×	±0.5	ANGLE ±3°	SCALE	4:1	
· × ×	±0.1		REV	A-3	
· × × ×	±0.05				
DRAWN 潘曉臨		DATE 98.10.21		TITLE SMA 4 HOLE PANEL MOUNT JACK	
APPROVAL		DATE		DRAWING NO 806-320601	
				FILE NO 806-0151	