


MATERIAL : BODY-BRASS
 CONTACT-BRASS
 SLEEVE-BRASS
 INSULATOR-TEFLON
 NUT-BRASS
 RING-BRASS
 SHELL-BRASS
 SI RUBBER-SILICONE
 C WASHER-BRASS

FINISH : BODY-NICKEL PLATING
 SLEEVE-NICKEL PLATING
 NUT-NICKEL PLATING
 RING-NICKEL PLATING
 SHELL-NICKEL PLATING
 CONTACT-GOLD PLATING OVER NICKEL

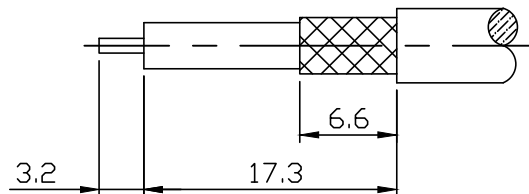

IMPEDANCE:50 OHM
 FREQUENCY RANGE:0 TO 11 GHZ
 VSWR:1.3 MAX
 VOLTAGE RATING:1,500 VOLTS RMS MAX
 INSULATION RESISTANCE:5,000 MEGOHMS MIN

| | | | | | |
|-------------------------------|-----------|-----------|---------------------|---|--|
| DIMENSIONS ARE IN MILLIMETERS | | | | C&C ELECTRONICS CONNECTORS INC | |
| TOLERANCE | | | | TITLE N MALE STRAIGHT CRIMP FOR RG 174u 316u | |
| · × ±0.5 | ANGLE ±3° | SCALE 3:1 | DRAWING NO 816-1106 | | |
| · × × ±0.1 | | REV A-0 | | | |
| · × × × ±0.05 | | DRAWN 郭姿良 | DATE 90.08.15 | FILE NO 816-0023 | |
| APPROVAL | DATE | | | | |